


## SCFT measurement turbine

### Device features

- Measurement principle: Turbine
- Response speed  $\leq 50$  ms
- Measurement range from 1 to 800 l/min
- Low flow resistance
- Suitable for reverse operation
- Built-in pressure and temperature ports



Volumetric flow rate sensors

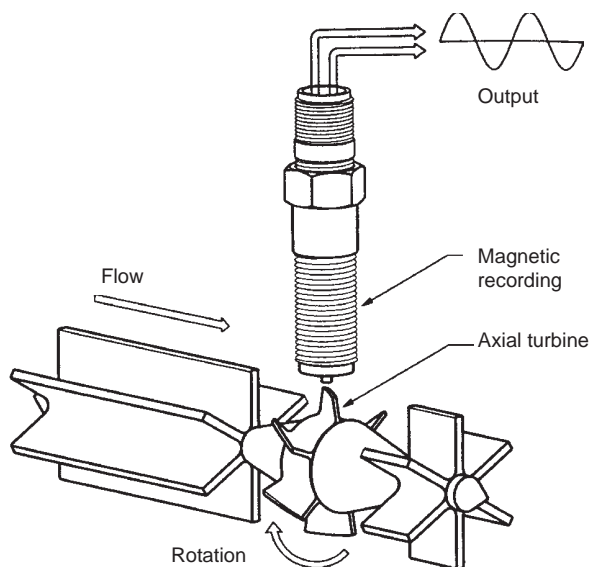

### Function

The turbine wheel is driven by the oil flow. The generated frequencies are processed through the digital electronics and influences from the disturbing flow effects are compensated for. Because of the low flow resistance  $Q_{R1}$ , the hydraulic circuit operates with very low losses.

Reverse operation is also possible because of the special vane (winged) design - so the turbine can be operated in both directions.

The turbine is fitted with an EMA-3 screw coupling for measuring pressure. Oil temperature can be measured directly in the oil flow of the turbine by connecting the temperature sensor (SCT-150). This provides all important measurements at the installation location.

### Application

The SCFT is the ideal solution if the volumetric flow rate needs to be recorded loss-free across a wide flow range (up to 800 l/min.).

## SCFT measurement turbine

### Technical data

SCFT-	015	060	150	300	600	800
Flow measuring range Q <sub>n</sub> (l/min)	1 to 15	3 to 60	5 to 150	8 to 300	15 to 600	20 to 800
Accuracy (± %) FS/IR @ 21cSt.	± 1 % FS	± 1 % IR	± 1 % IR	± 1 % IR	± 1 % IR	± 1 % IR
Operating pressure P <sub>n</sub> (bar)	350	350	350	350	290	400
Ports (A - B)	G1/2 BSPP	G3/4 BSPP	G3/4 BSPP	G1 BSPP	G1 1/4 BSPP	G1 7/8 UNF
Pressure drop ΔP (bar) @ (FS)	1.5	1.5	1.5	4	4	5
Weight (g)	650	750	750	1200	1800	2100

FS = Full Scale  
IR = Indicated Reading


Accuracy	
Response time	50 ms
Thermal drift	±0.05 % FS/°C
Repeat accuracy	± 0.5 % FS
Resistance to pressure	
Q <sub>max</sub> (l/min)	Q <sub>N</sub> × 1.1
Overload pressure P <sub>max</sub>	P <sub>N</sub> × 1.2
Material	
Housing	Aluminium
Seal	FKM
Parts in contact with sub- stances	Aluminium, steel, FKM
Ambient conditions	
Ambient temperature	+10 to +50 °C
Storage temperature	-20 to +80 °C
T <sub>max</sub> Fluid	-20 to +80 °C
Filtration	25 μm (10 μm for SCFT-015)
Viscosity range	15 to 100 cSt.

Ports	
Temperature measurement (SCT-150-14-07)	M10x1 OR
Pressure (EMA-3 connection)	M16x2
Pressure (VSTI)	G1/4 BSPP
Electrical connection	
Plug	M12x1; 5-pole
Power supply V <sub>+</sub>	18 to 30 V
Output signal	4 to 20 mA ± 0 to FS l/min
Complete output current range	0 to 21 mA
Current consumption	< 30 mA

Volumetric flow rate sensors

### Pin assignment

M12x1; 5-pole




PIN	Assignment
1	V <sub>+</sub>
2	n.c.
3	Q signal
4	n.c.
5	0 V / GND

## SCFT measurement turbine

### Dimensioned drawings

Volumetric flow rate sensors

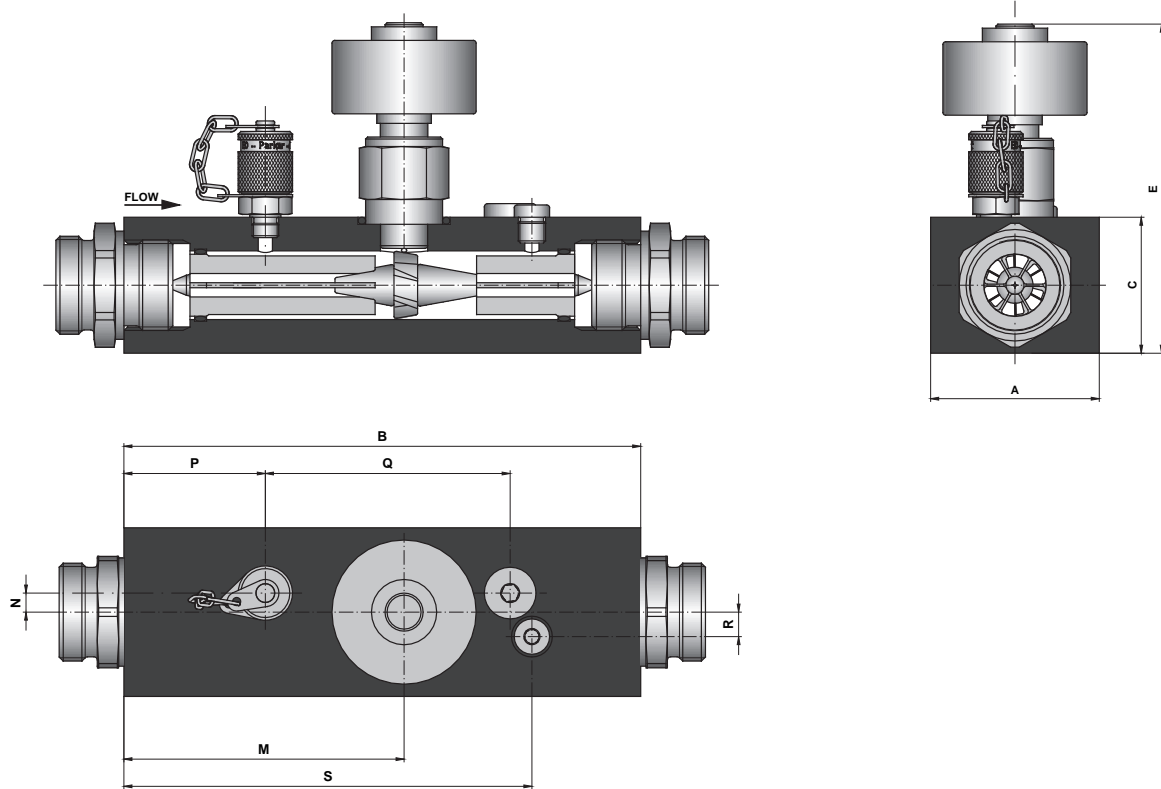

#	SCFT-015	SCFT-060	SCFT-150	SCFT-300	SCFT-600	SCFT-800
A	37	62	62	62	62	100
B	136	190	190	190	212	212
C	37	50	50	50	75	75
E	115	130	130	134	149	152
M	70	103	103	103	127	126
N	0	5	5	7	9	10
P	25	50	50	52	62	60
Q	N/A	92	92	90	106	104
R	0	5	5	9	11	10
S	115	157	157	150	168	181

## SCFT measurement turbine

### Order code

#### SCFT

M12x1, 4-pole; connecting plug; IP67  
 4 to 20 mA (3-wire)  
 1 to 15 l/min  
 4 to 60 l/min  
 6 to 150 l/min  
 10 to 300 l/min  
 20 to 600 l/min  
 25 to 800 l/min

**SCFT-015-22-07**  
**SCFT-060-22-07**  
**SCFT-150-22-07**  
**SCFT-300-22-07**  
**SCFT-600-22-07**  
**SCFT-800-22-07**

### Connection cable and single plug

**Connection cable, assembled**  
 (open cable end)

**SCK-400-xx-xx**

**Cable length (m)**

2 m ————— **02**  
 5 m ————— **05**  
 10 m ————— **10**

**Plug**

M12 cable jack; straight ————— **45**  
 M12 cable jack; 90° angled ————— **55**

#### Single connector

M12 cable jack; straight ————— **SCK-145**  
 M12 cable jack; 90° angled ————— **SCK-155**

Volumetric flow rate sensors