


Series PRDM are direct operated pressure reducing valves to regulate pressure in one area of a hydraulic circuit at a predetermined level below normal system pressure. Additionally, an integral pressure relieving function for the secondary reduced pressure circuit is incorporated into the design.

Funtion

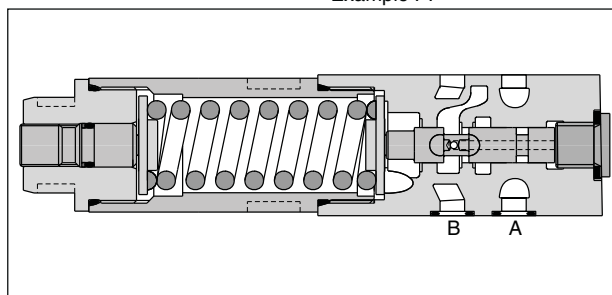
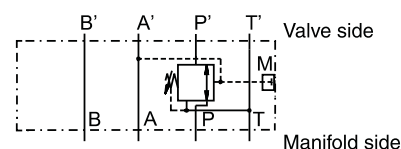



These valves are "normally open" devices that allow fluid to flow through the controlled port during their non-actuated or "at rest" condition. When downstream pressure exceeds the value set by the spring force, the control piston moves off its seat, closing off the flow path and thus reducing the fluid passing through from the main system. The cushioned piston modulates to maintain the preset pressure in this branch of the hydraulic circuit. If, due to external forces, the pressure continues to rise in this branch circuit, the piston will keep moving against the spring force allowing fluid to be drained to the tank, thereby limiting maximum pressure to the valve's setting.

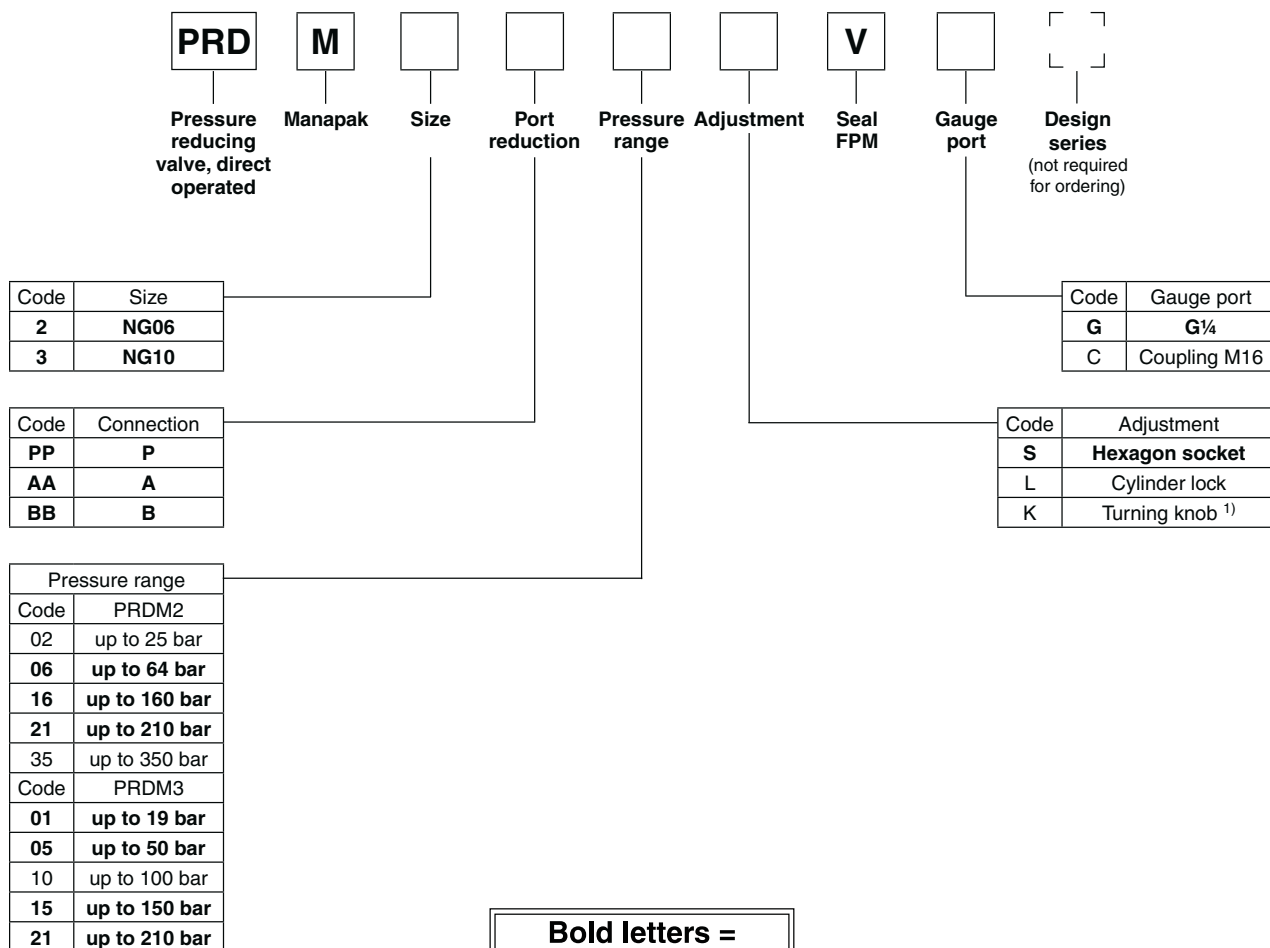
Features

- 3-way design for pressure relieving of the secondary side
- The direct operated, cushioned piston design results in fast response, low leakage and minimal hysteresis.
- Reduced pressure in the 'P', 'A' or 'B' port.
- Pressure settings:
25, 64, 160, 210, 350 bar for PRDM2,
19, 50, 100, 150, 210 bar for PRDM3.
- Gauge port
- PRDM2 - NG06 (CETOP 03)
PRDM3 - NG10 (CETOP 05)



Example PP


7
**Schematics
PRDM*AA**

PRDM*BB

Gauge port option C

PRDM*PP


Ordering code


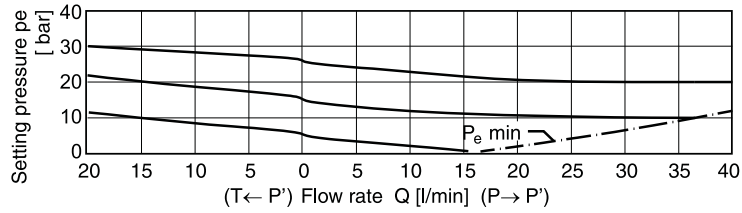
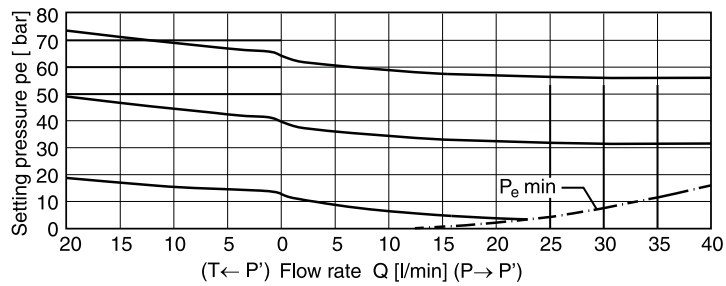
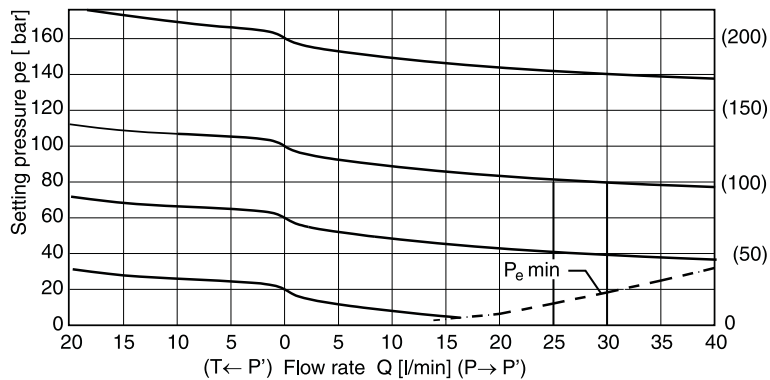
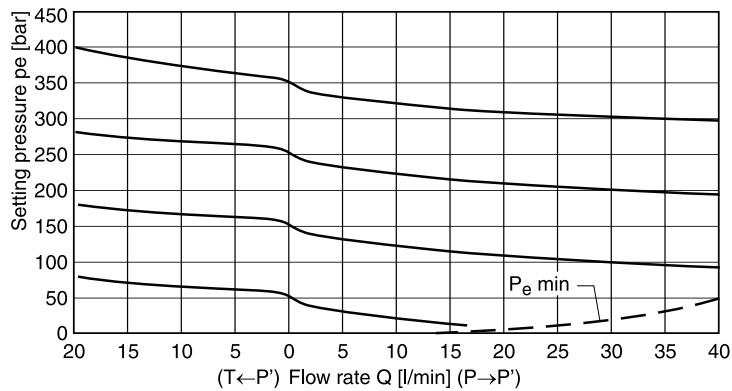
**Bold letters =
Short-term availability**

¹⁾ NG06 only.

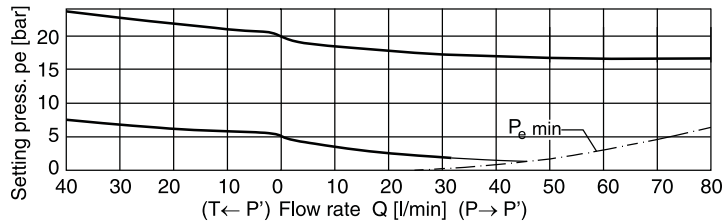
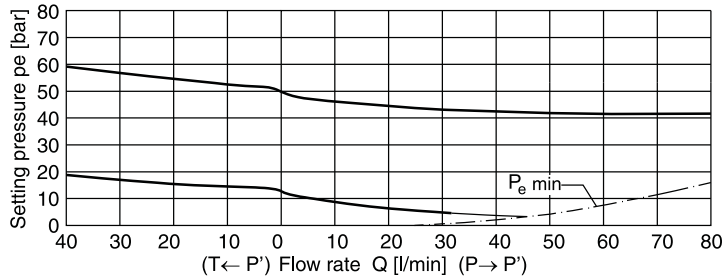
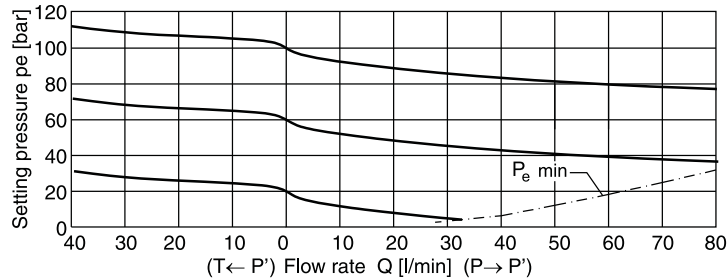
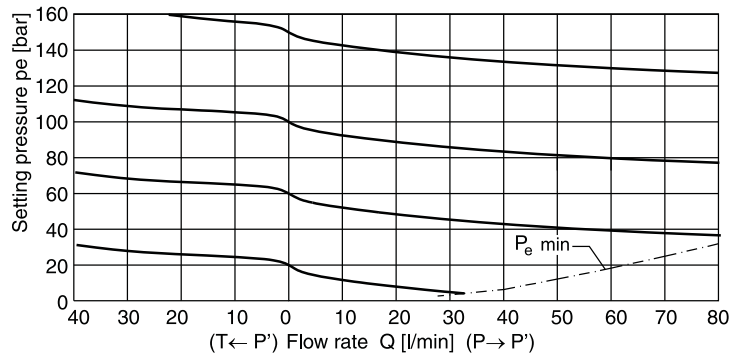
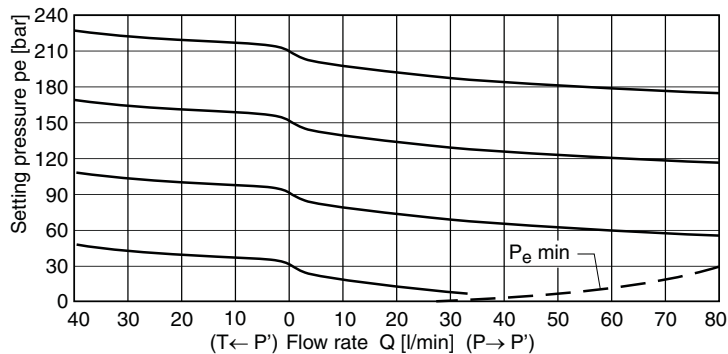
7

Technical data

General		PRDM2	PRDM3
Series		PRDM2	PRDM3
Size		NG06	NG10
Mounting interface		ISO 4401	
Ambient temperature	[°C]	-20...+60	
Weight	[kg]	1.3	2.6
MTTF _p value	[years]	150	
Hydraulic			
Max. operating pressure	P, A, B	350	315
	T	50	50
	[bar]		
Fluid		Hydraulic oil according to DIN 51524	
Fluid temperature	[°C]	-20...+70	
Viscosity, permitted	[cSt] / [mm ² /s]	20 ... 400	
recommended	[cSt] / [mm ² /s]	30 ... 80	
Filtration		ISO 4406 (1999); 18/16/13	

PRDM2 02

PRDM2 06

PRDM2 16/21
7

PRDM2 35


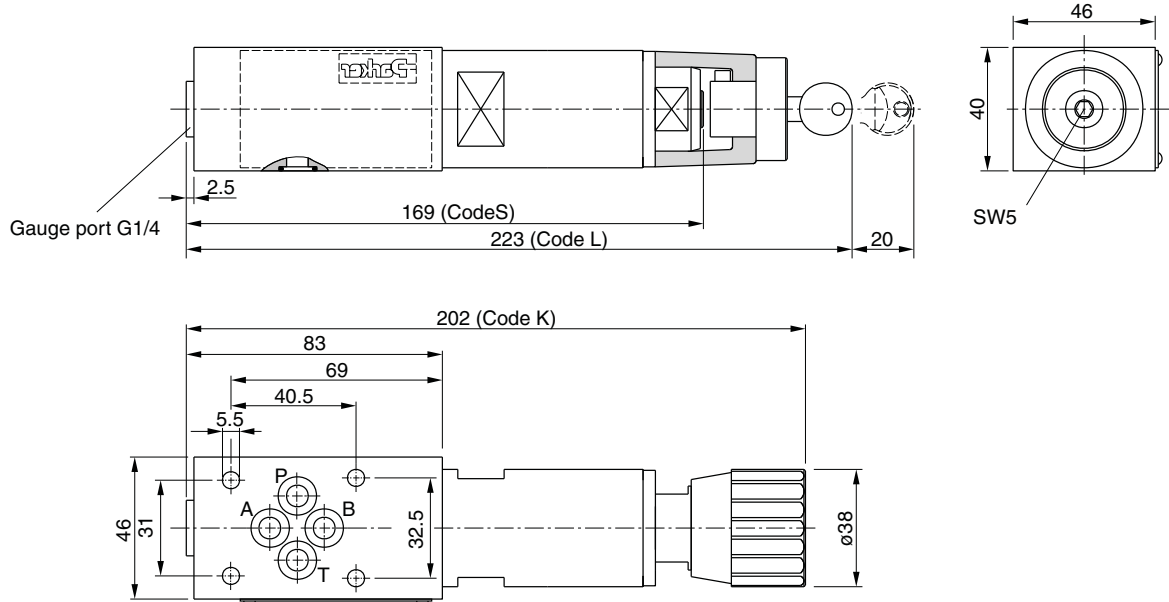
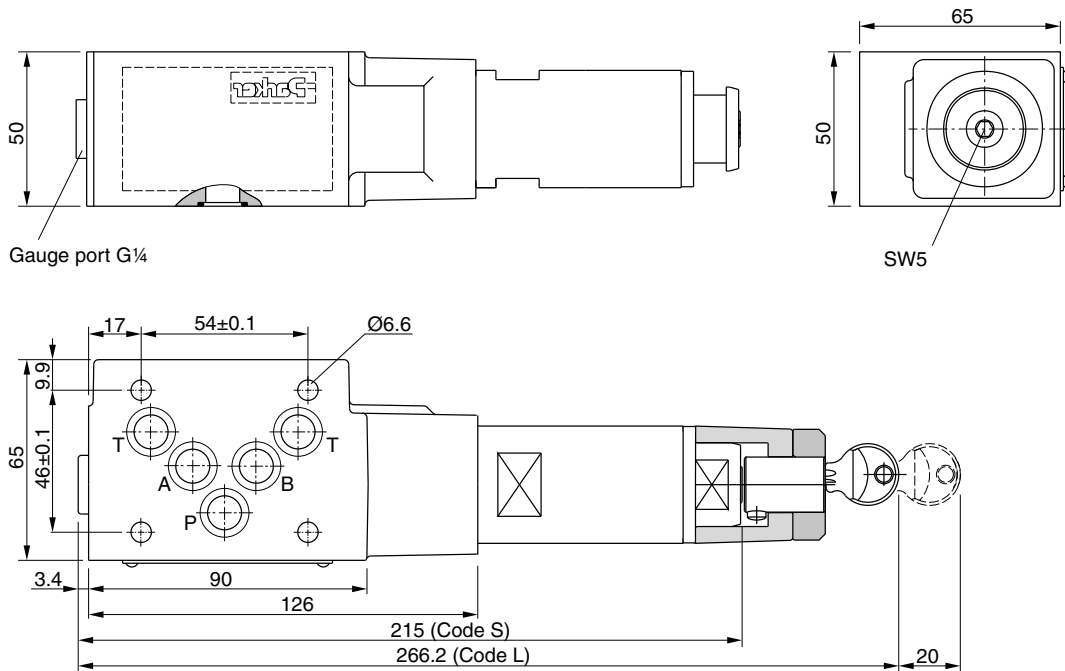
All characteristic curves measured with HLP46 at 50 °C.

PRDM3 01

PRDM3 05

PRDM3 10

PRDM3 15

PRDM3 21


All characteristic curves measured with HLP46 at 50 °C.

PRDM UK.INDD CM 13.08.18

7

PRDM2

7
PRDM3


Seal kit order code		
Seal	PRDM2	PRDM3
V	SK-PRDM2-V	SK-PRDM3-V

