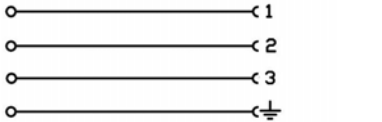







CC


- Connettore quadrato EN175301-803 stile A ISO4400
- Materiale rivestimento: **GOMMA TERMOPLASTICA**

- Square connector EN175301-803 style A ISO4400
- Coating material: **THERMOPLASTIC RUBBER**

without contacts, for crimp terminals senza contatti, per terminali faston	COD.:	Voltage Tensione Vdc:	Voltage Tensione Vac:	max current corrente max a @40°	Clamping voltage Tensione intervento V	
	03A00	1.250	1.250	10	--	
2 diodes (semi-wave rectifier) 2diodi (radrizzatore a semionda)	COD.:	Voltage Tensione Vdc:	Voltage Tensione Vac:	max current corrente max a @40°	Clamping voltage Tensione intervento V	
	1A	08K00	1.250	1.250	1	-1
	3A	10K00	1.250	1.250	3	-1
2 diodes (semi-wave rectifier) 2diodi (radrizzatore a semionda)	COD.:	Voltage Tensione Vdc:	Voltage Tensione Vac:	max current corrente max a @40°	Clamping voltage Tensione intervento V	
	08L00	1.250	1.250	1	-1	
diode in series diodo in serie	COD.:	Voltage Tensione Vdc:	Voltage Tensione Vac:	max current corrente max a @40°	Clamping voltage Tensione intervento V	
	1A	12K00	1.250	1.250	--	
	3A	12P00				
	5A	12N00				
diode in series diodo in serie	COD.:	Voltage Tensione Vdc:	Voltage Tensione Vac:	max current corrente max a @40°	Clamping voltage Tensione intervento V	
	12L00	1.250	1.250	1		
2 diodes (1-3, 1-2) for double solenoid per doppio solenoide 2 diodi (1-3, 1-2)	COD.:	Voltage Tensione Vdc:	Voltage Tensione Vac:	max current corrente max a @40°	Clamping voltage Tensione intervento V	
	71M00	1.250	--	10	-1	