


The direct operated directional valves series D1VW with inductive position control are typically used in safety relevant applications. The start or end position can be monitored. The position control is available for single and double solenoid valves.

The fail-safe position of the directional valve during power failure is the spring offset or center position.


Please find detailed information on the machine directive in the position paper in chapter 1.

Attention:


The adjustment of the position control is factory set and sealed. Replacement and repairs can only be undertaken by the manufacturer.




D1VW*B





D1VW*C




D1VW*B



D1VW*C

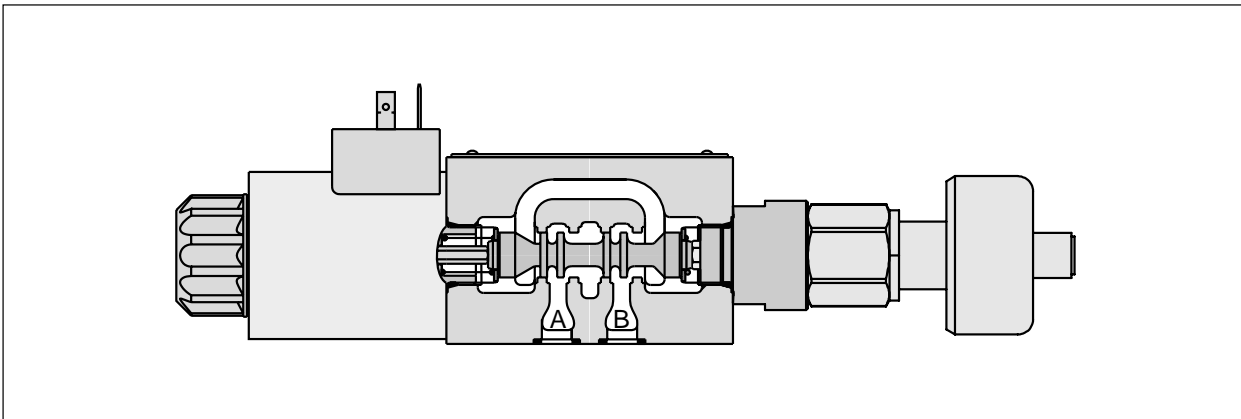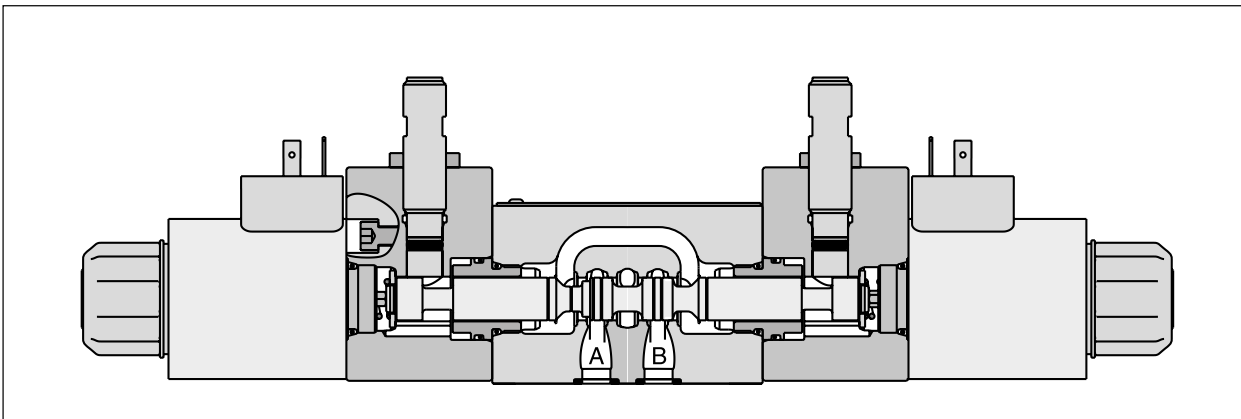D1VW*B

D1VW*C

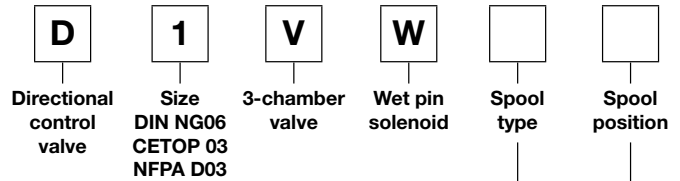
D1VW-IPC UK.indd 02.03.2021

2


| 3 position spools | |
|-------------------|------------|
| Code | Spool type |
| | a 0 b |
| 001 | |
| 002 | |
| 003 ¹⁾ | |
| 004 | |
| 005 | |
| 015 ²⁾ | |
| 016 | |
| 076 | |
| 078 | |

| 2 position spools | |
|-------------------|------------|
| Code | Spool type |
| | a b |
| 020 | |
| 026 ³⁾ | |
| 030 ³⁾ | |

| 3 position spools | | |
|-------------------|------------------------------------|--|
| Code | Spool position | |
| E | Operated in position "a". | 2 positions. Spring offset in position "0". |
| F | Spring offset in position "b". | 2 positions. Operated in position "0". |
| K | Operated in position "b". | 2 positions. Spring offset in position "0". |
| M | Spring offset in position "a". | 2 positions. Operated in position "0". |

| 2 position spools | | |
|-------------------|-------------------------------|--|
| Code | Spool position | |
| B | Operated in position "a". | 2 positions. Spring offset in position "b". |
| H | Operated in position "b". | 2 positions. Spring offset in position "a". |

¹⁾ Only available for spool position "E" and "F".


²⁾ Only available for spool position "K" and "M".

³⁾ Only available for spool position "B" and "H".

⁴⁾ To be used in combination with rectifier plugs at 120 VAC / 230 VAC power supply.

⁵⁾ Please order female connector M12x1 separately (see accessories, female connector M12x1 (order no.: 5004109).

⁶⁾ For hydraulic presses according to the safety regulations DIN EN ISO 16092-3, solenoid option "T" (without manual override) and accessory "I4N" or "I5N" (start position monitored) are required.

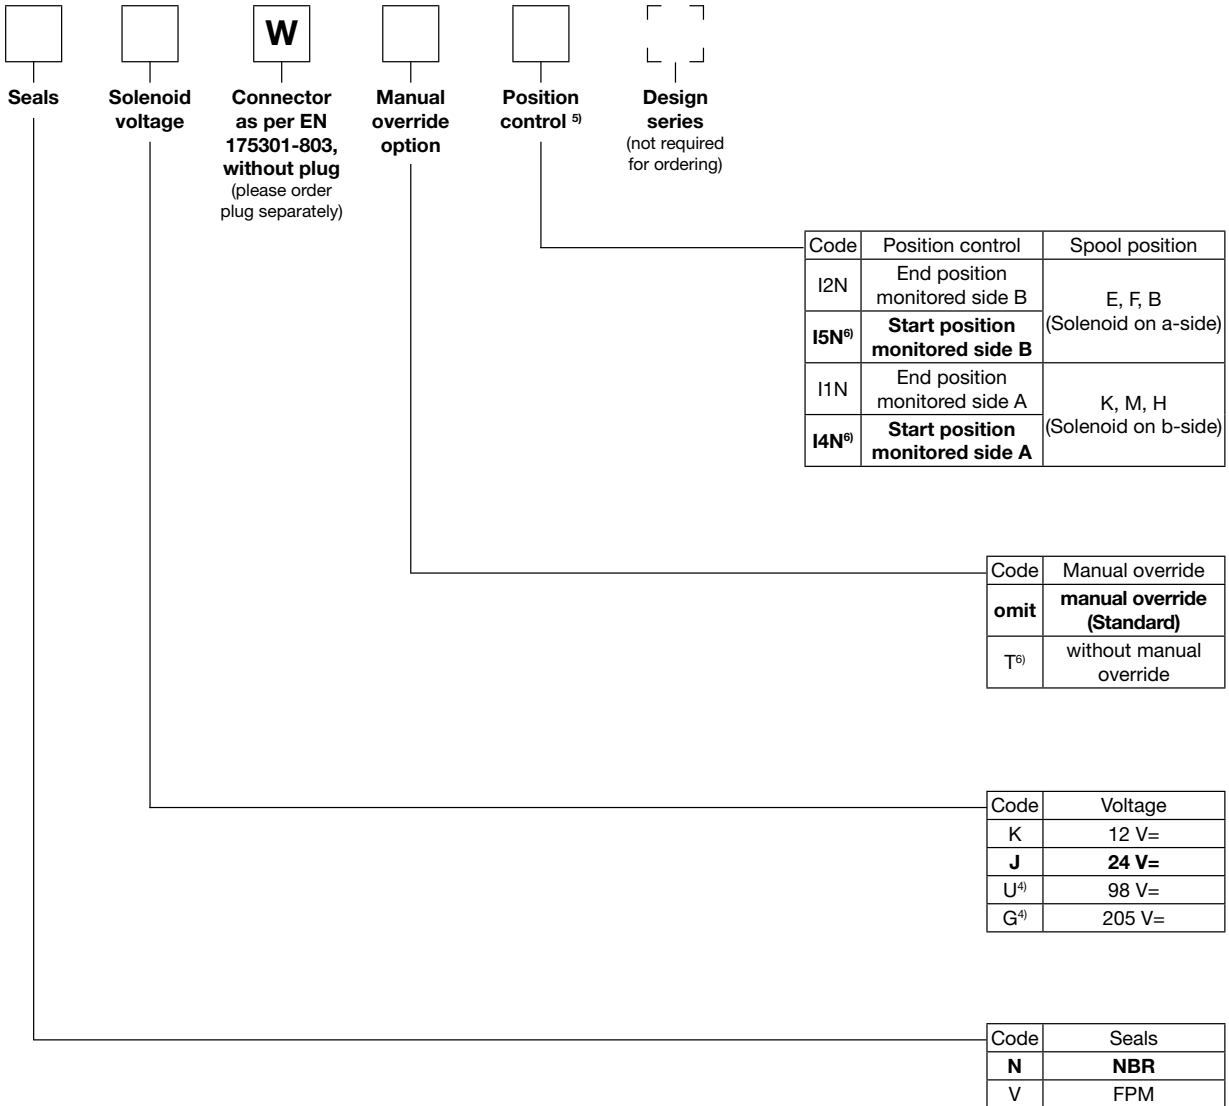

Bold letters =
Short-term availability

Further spool types and voltages on request.

D1VW-IPC UK.indd 02.03.2021

2

| | | | | | | | | | | | |
|---------------------------|--|-----------------|------------------|------------|----------------|-------|------------------|---|------------------------|--------------------------------|---|
| D | 1 | V | W | | | | | W | | | |
| Directional control valve | Size DIN NG06 CETOP 03 NFPA D03 | 3-chamber valve | Wet pin solenoid | Spool type | Spool position | Seals | Solenoid voltage | Connector as per EN 175301-803, without plug (please order plug separately) | Manual override option | Position control ⁵⁾ | Design series (not required for ordering) |

| 3 position spools | | |
|-------------------|------------|-----|
| Code | Spool type | |
| | a | 0 b |
| 001 | | |
| 002 | | |
| 003 ¹⁾ | | |
| 004 | | |
| 015 ¹⁾ | | |

| 2 position spools | | |
|-------------------|------------|---|
| Code | Spool type | |
| | a | b |
| 020 | | |

| 3 position spools | | |
|-------------------|----------------|--|
| Code | Spool position | |
| C | | 3 positions. Spring offset in position "0". Operated in position "a" or "b". |

| 2 position spools | | |
|-------------------|----------------|---|
| Code | Spool position | |
| D ²⁾ | | 2 positions. Operated in position "a" or "b". No center or offset position. |

| Code | Position control | Spool position |
|-------------------|------------------|----------------|
| I3N | End positions | C, D |
| I6N ⁴⁾ | Start positions | C |

| Code | Manual override |
|-----------------|----------------------------|
| omit | manual override (Standard) |
| T ⁴⁾ | without manual override |

| Code | Voltage |
|-----------------|---------|
| K | 12 V= |
| J | 24 V= |
| U ³⁾ | 98 V= |
| G ³⁾ | 205 V= |

| Code | Seals |
|------|-------|
| N | NBR |
| V | FPM |

Further spool types and voltages on request.

¹⁾ Only for position control code "I6N".

²⁾ Only for position control code "I3N".

³⁾ To be used in combination with rectifier plugs at 120 VAC / 230 VAC power supply.

⁴⁾ For hydraulic presses according to the safety regulations DIN EN ISO 16092-3, solenoid option "T" (without manual override) and accessory "I6N" (start positions) is required.


⁵⁾ Please order plug M12 x 1 separately. Straight plug recommended – no defined position possible for angled plug.

| General | | | | | |
|----------------------------|---------------|---|--------|--------|---------|
| Design | | Directional spool valve | | | |
| Actuation | | Solenoid | | | |
| Size | | DIN NG06 / CETOP 03 / NFPA D03 | | | |
| Mounting interface | | DIN 24340 A6 / ISO 4401 / CETOP RP 121-H / NFPA D03 | | | |
| Mounting position | | unrestricted, preferably horizontal | | | |
| Ambient temperature | [°C] | -20...+60 | | | |
| MTTF _D value | [years] | 150 | | | |
| Weight | [kg] | 1.8 (1 solenoid) / 3.8 (2 solenoids) | | | |
| Hydraulic | | | | | |
| Max. operating pressure | [bar] | P, A B: 350 ; T: 210 | | | |
| Fluid | | Hydraulic oil according to DIN 51524 | | | |
| Fluid temperature | [°C] | -20 ... +70 | | | |
| Viscosity permitted | [cSt] [mm²/s] | 2.8...400 | | | |
| / | | | | | |
| Viscosity recommended | [cSt] [mm²/s] | 30...80 | | | |
| / | | | | | |
| Filtration | | ISO 4406 (1999); 18/16/13 | | | |
| Flow max. | [l/min] | 80 (see shift limits) | | | |
| Leakage at 50 bar | [ml/min] | Up to 10 per flow path, depending on spool | | | |
| Static / Dynamic | | | | | |
| Step response at 95 % | [ms] | Energized: 32 ; De-energized: 40 | | | |
| Electrical characteristics | | | | | |
| Duty ratio | | 100 % ED; CAUTION: coil temperature up to 150 °C possible | | | |
| Max. switching frequency | [1/h] | 15000 | | | |
| Protection class | | IP65 in accordance with EN 60529 (with correctly mounted plug-in connector) | | | |
| | Code | K | J | U | G |
| Supply voltage | [V] | 12 V = | 24 V = | 98 V = | 205 V = |
| Tolerance supply voltage | [%] | ±10 | ±10 | ±10 | ±10 |
| Current consumption | [A] | 2.72 | 1.29 | 0.33 | 0.13 |
| Power consumption | [W] | 32.7 | 31 | 31.9 | 28.2 |
| Solenoid connection | | Connector as per EN 175301-803, solenoid identification as per ISO 9461. | | | |
| Wiring min. | [mm²] | 3 x 1.5 recommended | | | |
| Wiring length max. | [m] | 50 recommended | | | |


With electrical connections the protective conductor (PE ⚡) must be connected according to the relevant regulations.

Single solenoid valves
Electrical characteristics of position control as per IEC 61076-2-101 (M12x1)
2

| | | |
|--|-------|--|
| Supply voltage | [VDC] | 24 |
| Tolerance supply voltage | [%] | ±20 |
| Ripple supply voltage | [%] | ≤10 |
| Polarity protection | [V] | 300 |
| Current consumption without load | [mA] | ≤20 |
| Switching hysteresis | [mm] | <0.06 |
| Max. output current per channel, ohmic | [mA] | 250 |
| Ambient temperature | [°C] | -20 ... +60 |
| Protection | | IP65 acc. EN 60529 (with correctly mounted plug-in connector) |
| Min. distance to next AC solenoid | [m] | 0.1 |
| Interface | | M12x1 to IEC 61076-2-101 |
| CE conform | | EN 61000-4-2 / EN 61000-4-4 / EN 61000-4-6 ¹⁾ / ENV 50140 / ENV 50204 |

M12 pin assignment


- 1 + U_s 19.2...28.8 V
- 2 Out B: normally open
- 3 0V
- 4 Out A: normally closed

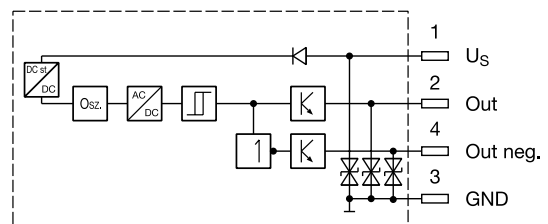

Outputs: Open collector

Definitions
Start position monitored:

The valve is de-energized. The inductive switch gives a signal at the moment when the spool leaves the spring offset position (below 15 % spool stroke).

At the switching point the spool is located within the closed position. It is secured that only the flow paths of the offset position are granted.

End position monitored:


The inductive switch gives a signal before the end position is reached (above 85 % spool stroke).

The switch can only be located on the opposite side of the solenoid for direct operated valves. Please order plug M12x1 separately (see accessories, plug M12x1; order no.: 5004109).


¹⁾ Only guaranteed with screened cable and female connector

Double solenoid valves
Electrical characteristics of position control as per IEC 61076-2-101 (M12x1)


| | |
|---|---|
| Protection class | IP65 in accordance with EN 60529 (with correctly mounted plug-in connector) |
| Ambient temperature [°C] | -20...+60 |
| Supply voltage U_s / ripple [V] | 10...30 / ± 10 % |
| Current consumption without load [mA] | ≤ 10 |
| Max. output current per channel, ohmic [mA] | 200 |
| Min. output load per channel, ohmic [kOhm] | 100 |
| Max. output drop at 0.2 A [V] | ≤ 2 |
| EMC | EN61000-6-4 / EN61000-6-2 |
| Min. distance to next AC solenoid [m] | >0.1 |
| Interface | M12x1 acc. to IEC 61076-2-101 |
| Wiring min. [mm ²] | 3 x 0.14 braid shield recommended |
| Wiring length max. [m] | 50 recommended |

2
M12 pin assignment


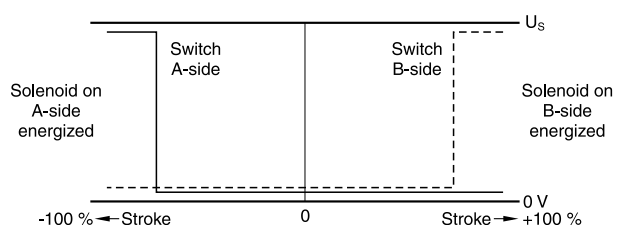
- 1 U_s 10...30 V
- 2 not connected
- 3 0 V
- 4 Out A: normally open

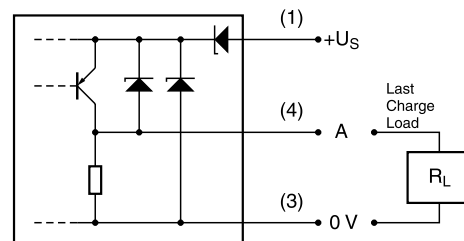
Definitions
Start position monitored:

The valve is de-energized. The inductive switch gives a signal at the moment when the spool leaves the center position (below 15 % spool stroke). At the switching point the spool is located within the closed position. It is secured that only the flow paths of the offset position are granted.

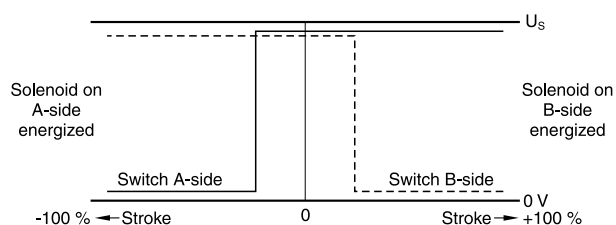
End position monitored:

The inductive switch gives a signal before the end position is reached (above 85 % spool stroke).




Please order plug M12 x 1 separately. Straight plug recommended – no defined position possible for angled plug.

The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve

number for each spool type, operating position and flow direction is given in the table below.

| Spool | Position „b“ | | Position „a“ | | Position „0“ | | | | |
|-------|--------------|------|--------------|------|--------------|------|------|------|------|
| | P->A | B->T | P->B | A->T | P->A | P->B | A->T | B->T | P->T |
| 001 | 2 | 2 | 2 | 2 | – | – | – | – | – |
| 002 | 1 | 4 | 1 | 4 | 1 | 1 | 5 | 5 | 2 |
| 003 | 3 | 4 | 3 | 6 | – | – | 7 | – | – |
| 004 | 2 | 3 | 2 | 3 | – | – | 7 | 7 | – |
| 005 | 2 | 2 | 2 | 2 | 12 | – | – | – | – |
| 015 | 3 | 6 | 3 | 4 | – | – | – | 7 | – |
| 016 | 2 | 2 | 2 | 2 | – | 12 | – | – | – |
| 020 B | 4 | 4 | 2 | 3 | – | – | – | – | – |
| 026 B | 4 | – | 4 | – | – | – | – | – | – |
| 030 B | 2 | 3 | 1 | 2 | – | – | – | – | – |

Flow curve diagram

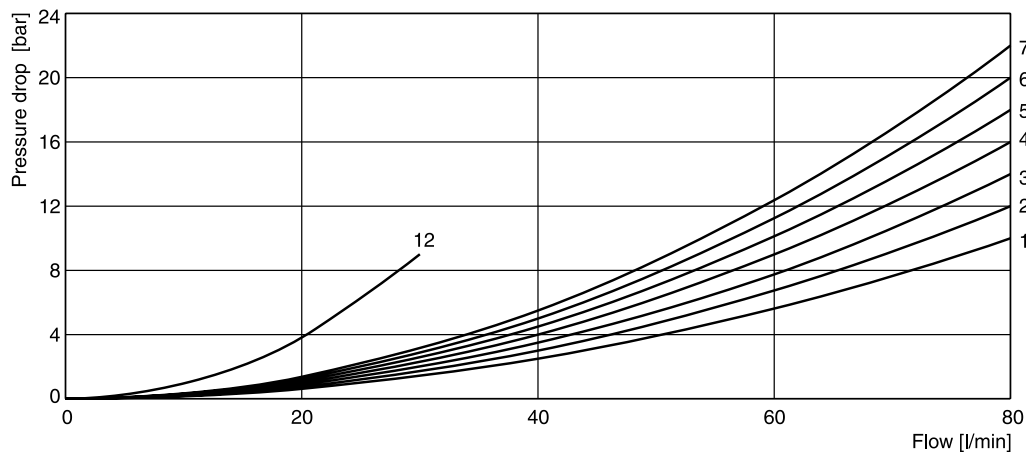


All characteristic curves measured with HLP46 at 50 °C.

Shift limit diagram

The diagram below specifies the shift limits. Valves with spool position “F” or “M” can only be operated up to 70 % of the limits. The specifications apply to a viscosity of 40 mm²/s and balanced flow conditions. The shift limits can


be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.

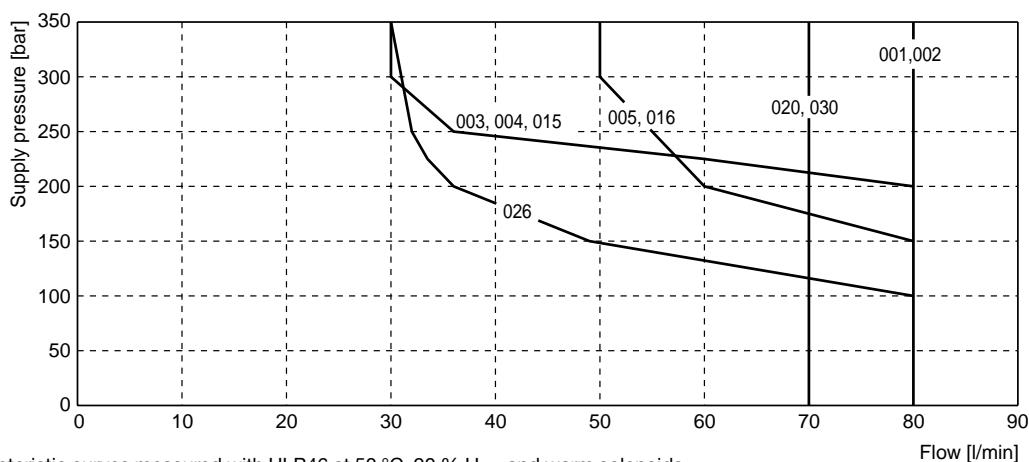


All characteristic curves measured with HLP46 at 50 °C, 90 % U_{nom} and warm solenoids.

D1VW-IPC UK.indd 02.03.2021


Interface EN 175301-803, DC solenoid, without plug M12x1¹⁾
 B, E, F -style

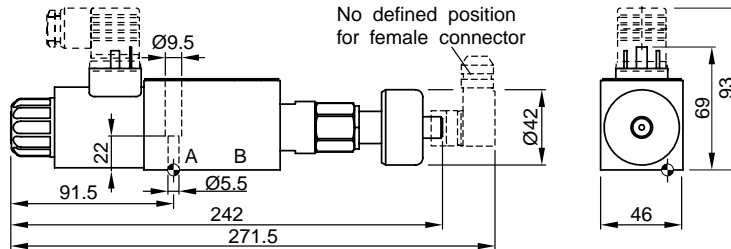

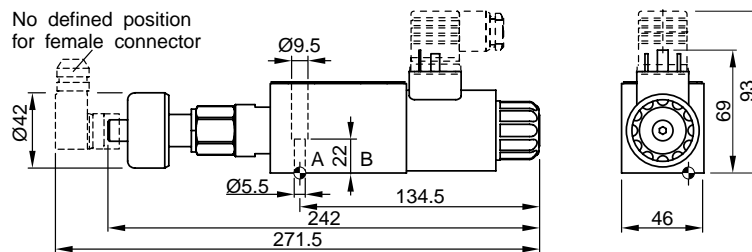



2

H, K, M -style

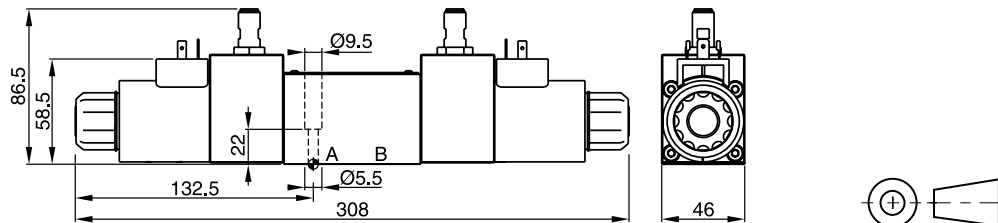

Interface EN 175301-803, DC solenoid, without plug M12x1²⁾
 C, D -style



| Surface finish |  Kit |  |  |  Kit |
|--|---|---|---|---|
| $\sqrt{R_{max} 6.3}$  | BK375 | 4x M5x30 ISO 4762-12.9 | 7.6 Nm ±15 % | NBR: SK-D1VW-N-91 FPM: SK-D1VW-V-91 |

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.

The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.

The space necessary to remove the M12x1 female connector is at least 22 mm.

Attention:

The adjustment of the position control is factory set and sealed. Replacement and repairs can only be undertaken by the manufacturer.

¹⁾ Please order plug M12x1 separately (see accessories, plug M12x1; order no.: 5004109).

²⁾ Please order plug M12x1 separately. Straight plug recommended – no defined position possible for angled plug.