




Compact hydraulic power pack NHY-K-5-2,3-230-1,1/400/24V=
Art.Nr. 50400001

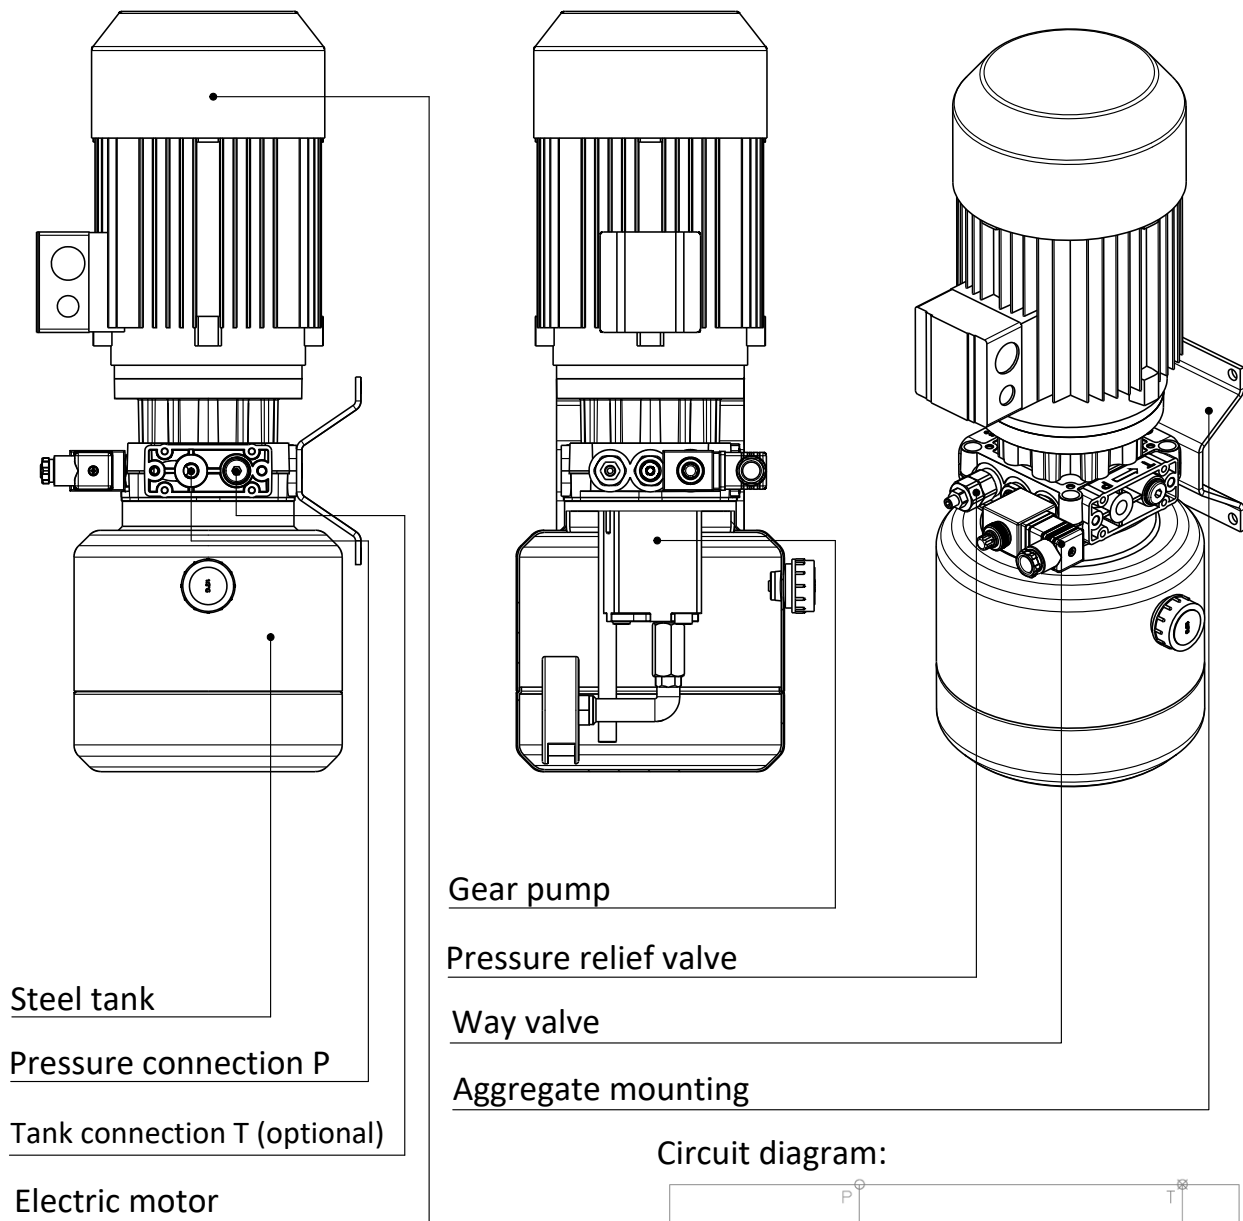


Medium: HLP46

Operating temperature: 0°C - 55°C

max. operating pressure: 230bar

Circuit diagram:

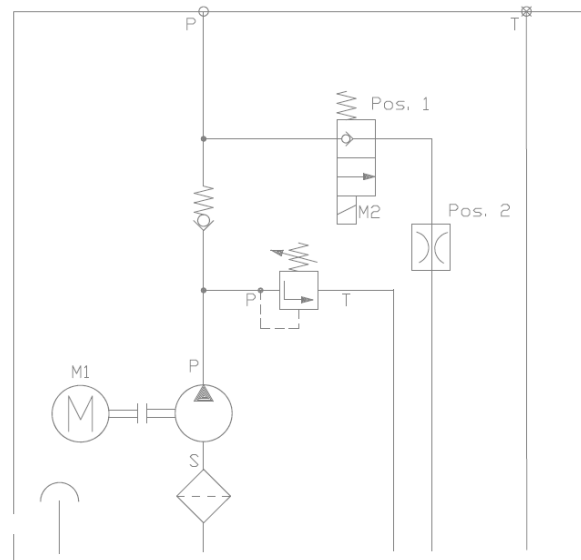

Archivierung: 05/2023

Technical Data

Steel tank

V=5L

Pressure connection P

G1/4 Zoll

Tank connection T

G1/4 Zoll

E-Motor

1,1kW 230/400V 50/60Hz/3~ AC

Gear pump

1,6 ccm/U (Q=ca.2,3 l/min at 1450 U/min)

Pressure relief valve

adjusted to p max. 230bar

Valve option pos. 1

Art. no.50410003 2/2 way valve, normally open

Valve option pos. 2

Art. no. 5041006	Reduction throttle valve 1l/min, not adjustable
Art. no. 5041007	Reduction throttle valve 2l/min, not adjustable
Art. no. 5041008	Reduction throttle valve 4l/min, not adjustable

Valve coil

Art. Nr. 50410000	Valve coil 24V DC
Art. Nr. 50410001	Valve coil 220V RAC

Aggregate mounting

Art. no. 50410009 Aggregate holder



Electrical control

Art. No. 50410010 Cable remote control for electric motor 24V DC and 2/2 way valve (24V DC)

Supply voltage customer side

Mounting position

For horizontal installation, filling connection must point upwards

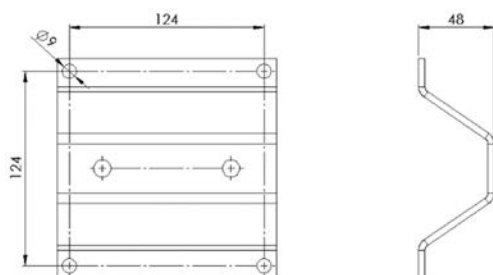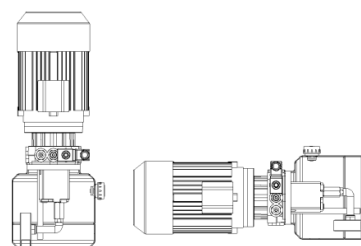

Archivierung: 05/2023