



Compact hydraulic power pack NHY-K-5-2,3-230-1,1/400/24V= Art.Nr. 50400002

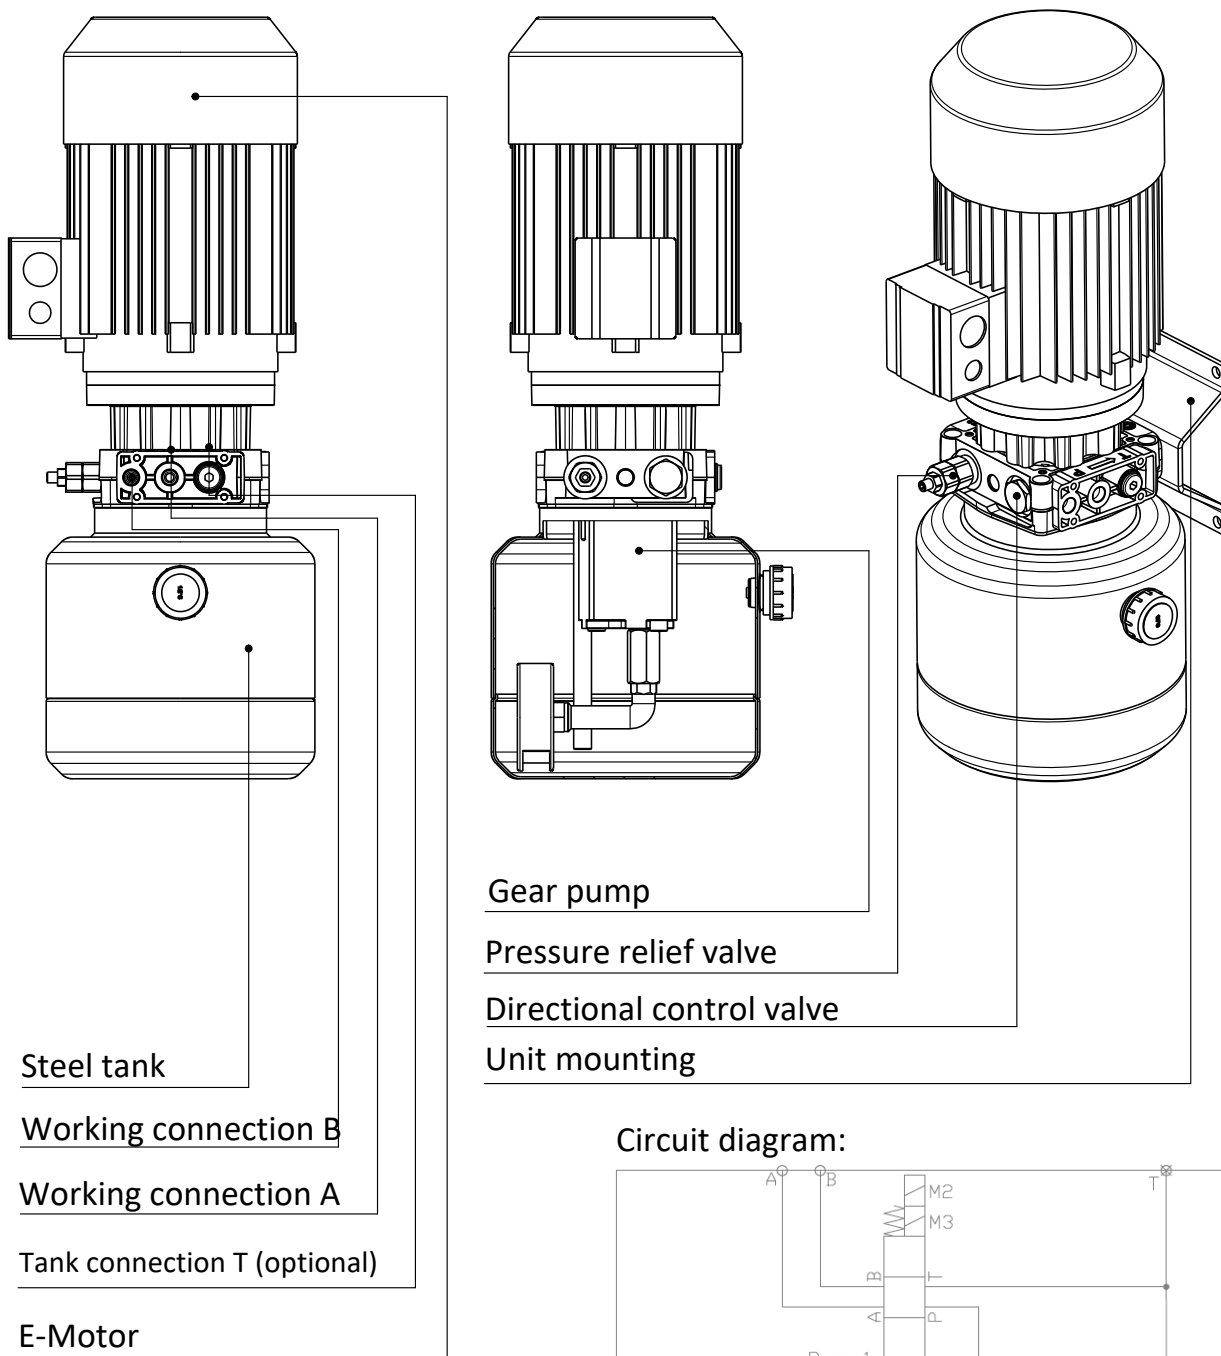

Circuit diagram:

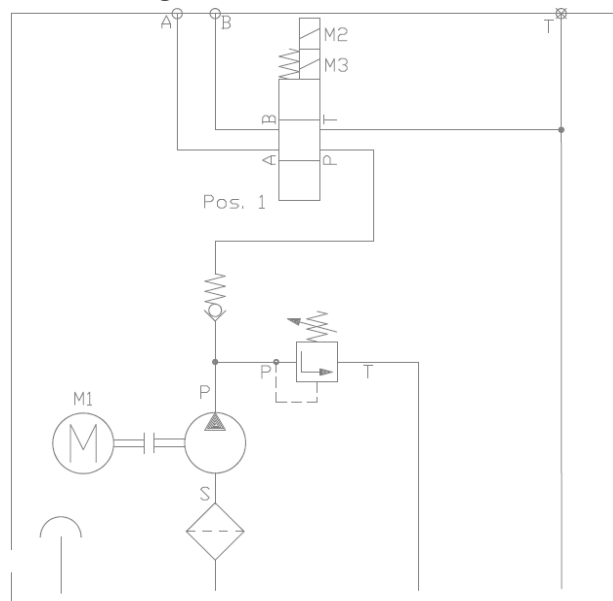

Archivierung: 05/2023

Technical data

Steel tank

V=5L

Working connection B

G1/4 Zoll

Working connection A

G1/4 Zoll

Tank connection T

G1/4 Zoll

E-Motor

1,1kW 230/400V 50/60Hz/3~ AC

Gear pump

1,6 ccm/U (Q=ca.2,3 l/min at 1450 U/min)


Pressure relife valve

set to p max. 230bar

Valve option Pos. 1

Art. no. 50410004 4/3 way valve cartridge, zero position
A+B blocked, P+T connected

Art. no. 50410005 4/3 way valve cartridge, zero position
A+B+P+T connected




Valve coil

Art. Nr. 50410002 Valve coil 24V DC

Aggregate mounting

Art. no. 50410009 Aggregate mounting

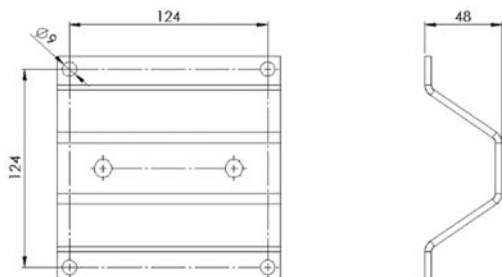

Electrical control

Art. No. 50410010 Cable remote control
for electric motor 24V DC and 2/2-way
valve (24V DC)

Supply voltage on customer side

Mounting position

For horizontal installation, the filling
connection must point upwards.

